



නියෝජ්‍ය ප්‍රධාන ලේකම් (ඉංජිනේරු සේවා) - දකුණු පළාත
பிரதி பிரதம செயலாளர் (பொறியியல் சேவை) - தென் மாகாணம்
Deputy Chief Secretary (Engineering Services) - Southern Province

දකුණු පළාත් ඉංජිනේරු සේවා කාර්යාලය - කොටුව, ගාල්ල.
 தென்மாகாணப் பொறியியல் சேவைக் காரியாலயம் - கோட்டை, காலி.
Southern Provincial Engineering Services Office, Fort, Galle.

නියෝජ්‍ය ප්‍රධාන ලේකම් (ඉංජිනේරු සේවා)
 Deputy Chief Secretary (Engineering Service) : Tel/Fax: 091-2242786

විද්‍යුත් තැපෑල
 E-mail : gaks@sltnet.lk / info-eng@cs.spgov.lk

මගේ අංකය **SPES/03/01/1-22/2022** ඔබේ අංකය
 My No. Your No.

දිනය **2022.07.04**
 Date


ප්‍රධාන ලේකම් - දකුණු පළාත.
 ලේකම් - මුදල්, ක්‍රම සම්පාදන ... අමාත්‍යාංශය.
 ලේකම් - කෘෂිකර්ම, වාරිමාරග... අමාත්‍යාංශය.
 ලේකම් - ධීවර සත්ව නිෂ්පාදන ... අමාත්‍යාංශය.
 ලේකම් - අධ්‍යාපන, ඉඩම් ... අමාත්‍යාංශය.
 ලේකම් - ක්‍රීඩා හා යෞවන කටයුතු ... අමාත්‍යාංශය.
 පළාත් වාරිමාරග අධ්‍යක්ෂ - දකුණු පළාත
 පළාත් පාලන කොමසාරිස් - දකුණු පළාත
 සාමාන්‍යාධිකාරී, පළාත් මාරග සංවරධන අධිකාරිය - දකුණු
 දකුණු පළාත් සෞඛ්‍ය සේවා අධ්‍යක්ෂ
 දිස්ත්‍රික් ලේකම් - ගාල්ල / මාතර / හම්බන්තොට
 දිස්ත්‍රික් ඉංජිනේරු (ගොඩනැගිලි) - ගාල්ල / මාතර / හම්බන්තොට
 අධ්‍යක්ෂ ජනරාල් - දකුණු පළාත් සංවරධන අධිකාරිය

මහත්මයාණෙනි,

2022 - ජූලි මස සඳහා වූ 2022.06.29 දින පැවති මිල කමිටුව අනුව සංශෝධිත මිල ගණන් ඉදිරිපත් කිරීම.

2022 - වර්ෂයේ I භාගයේ මිල ගණන් වල අදාල සංශෝධන සහිතව 2022 - I භාගයේ නව මිල ගණන් 2022.07.04 දින දකුණු පළාත් ප්‍රධාන ලේකම් කාර්යාලයේ www.cs.sp.gov.lk වෙබ් අඩවියට ඇතුළත් කර ඇති අතර එහි අංක 1-Demolisher විෂය 1% ක ප්‍රතිශතයකින් වැඩිවන අතර එහි අයිතම අංක:1a-DM-04/4a 2% ක ප්‍රතිශතයකින් වැඩිවේ. තවද අනෙකුත් අයිතමයන් සඳහා වන මිල ගණන් 2022.06.03 දින නිකුත් කරන ලද මිල ගණන් ලෙසම බලපැවැත්වේ.

මෙම මිල ගණන් 2022.07.04 දින සිට බලපැවැත්වෙන පරිදි ක්‍රියාත්මක වන බවද කාරුණිකව දන්වමි.

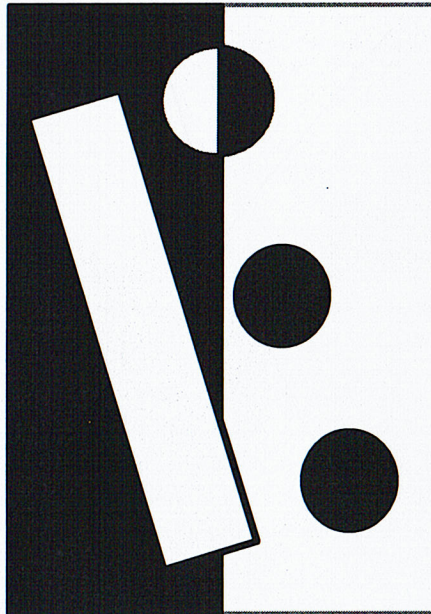

 ඉංජි. කේ.පී. වික්‍රමගේ,
 පළාත් ගොඩනැගිලි අධ්‍යක්ෂ,
 දකුණු පළාත.

Eng. K. P. WICKRAMAGE
 Provincial Director (Buildings)
 Engineering Services Office
 Fort - Galle.

- පිටපත් - 01. ප්‍රධාන ඉංජිනේරු (පාසල් ගොඩනැගිලි) - කරු.දැ.ගැ.ස.
 02. ප්‍රධාන ඉංජිනේරු (වෙනත් ගොඩනැගිලි) - කරු.දැ.ගැ.ස.
 03. විදුලි ඉංජිනේරු - කරු.දැ.ගැ.ස.
 04. ඉංජිනේරු සහකාර / විදුලි අධිකාරී - කරු.දැ.ගැ.ස.

RATES
2022 FIRST HALF

Revised (2022.06.29)



**SOUTHERN PROVINCIAL ENGINEERING
SERVICES OFFICE
FORT , GALLE.**

**Rate Schedule for Construction & Repair Works - All
2022 First Half Revised (2022.06.29)-Southern Province**

Demolisher


Item Code	Description	Unit	Rate -LKR
Dm-01	Demolishing brickwork in cement stacking brick and clearing debris away from site	m ³	1,741.00
Dm-02	Demolishing brickwork in lime stacking brick and clearing debris away from site	m ³	2,265.00
Dm-03	Demolishing cabook masonry in lime mortar stacking cabook and clearing debris away from site	m ³	2,003.00
Dm-04	Demolishing existing building walls above DPC level by machine & Clearing debris transport 01 Km away from site	m ³	536.00
Dm-04a	Demolishing existing wall foundation upto DPC level by machine & Clearing debris transport 01 Km away from site	m ³	1,578.00
Dm-05	Removing existing Ceiling, stacking materials and clearing debris - away from site <i>6th floor</i>	m ²	252.00
Dm-05a	Removing existing Ceiling, stacking materials and clearing debris - 1st floor	m ²	259.00
Dm-06	Demolishing Cement concrete , and clearing debris in floors away from site	m ³	9,463.00
Dm-07	Demolishing reinforced cement concrete in suspended floors , removing reinforcement and clearing debris away from site	m ³	16,246.00
Dm-08	Removing and stacking corrugated sheets, asbestos or aluminium with roof frame	m ²	268.00
Dm-09	Removing and stacking corrugated sheets, asbestos or aluminium with roof frame (two storied)	m ²	275.00
Dm-09a	Removing and stacking corrugated sheets, asbestos or aluminium with roof frame (three storied)	m ²	281.00
Dm-10	Removing and stacking Door or Window, from existing walls	m ²	399.00
Dm-11	Removing and stacking Door or Window sash from existing frame	m ²	114.00
Dm-12	Removing and stacking PVC Down pipes, old or decayed, from existing building	m	48.00
Dm-13	Demolishing drains and clearing debris away from site	m	193.00
Dm-14	Removing and stacking Expanded Metal ,2"x2" GI mesh or Iron grill from existing frames	m ²	303.00

Demolisher

Item Code	Description	Unit	Rate -LKR
Dm-15	Uprooting fence post , rolling up and stacking barbed wire and all . other materials (Length of fencing to be measured)	m	464.00
Dm-16	Demolishing floors 3" thick brick paved, and clearing debris away from site	m ²	240.00
Dm-17	Removing and stacking gate sash after demolishing cement concrete blocks or removing posts and separating pintle (Demolishing brickwork where necessary paid for separately).	nr	2,978.00
Dm-18	Removing and stacking PVC gutter, eave gutter, from roofs of single storied buildings	m	88.00
Dm-18a	Removing and stacking PVC gutter, eave gutter, from roofs of 2 storied buildings	m	92.00
Dm-18b	Removing and stacking gutter, eaves, from roofs of three storied buildings	m	94.00
Dm-19	Removing and stacking partitions at site including making good to walls and floors	m ²	1,168.00
Dm-20	Chipping lime plastering and clearing debris away	m ²	120.00
Dm-21	Chipping rendering, cement, and clearing debris away from brick walls and floors	m ²	360.00
Dm-22	Chipping rendering, cement, and clearing debris away from cement concrete floors and walls	m ²	541.00
Dm-23	Roof removing tiles and timber, stacking serviceable materials and clearing debris in single storied buildings	m ²	498.00
Dm-23a	Roof removing tiles and timber, stacking serviceable materials and clearing debris in two storied buildings	m ²	515.00
Dm-23b	Roof removing tiles and timber, stacking serviceable materials and clearing debris in three storied buildings	m ²	525.00
Dm-24	Demolishing rubble masonry in cement, stacking rubble and clearing debris away from site with scaffolding	m ³	3,419.00
Dm-24a	Demolishing rubble masonry in cement, stacking rubble and clearing debris away from site	m ³	3,290.00
Dm-25	Demolishing tiles, glazed and clearing debris away from site	m ²	640.00
Dm-26	Removing and stacking tiles Calicut or half round, from roof of singles storied buildings	m ²	198.00


Demolisher

Item Code	Description	Unit	Rate -LKR
Dm-26a	Removing and stacking tiles Calicut or half round, from roof of two storied buildings	m ²	205.00
Dm-26b	Removing and stacking tiles Calicut or half round, from roofs of three storied buildings	m ²	210.00
Dm-27	Removing and stacking Valance, Barge board materials and clearing debris away in single storied building	m	88.00
Dm-27a	Removing and stacking Valance, Barge board materials and clearing debris away in two storied building	m	92.00
Dm-28	Chipping cement plaster, soffit and clearing debris away from site	m ²	523.00
Dm - 29	Removing tiles & reapers from the roof & stacking serviceable materials and clearing debris away .	m ²	226.00
Dm - 30	Washing & clearing floor & 200 mm height wall area	m ²	54.00
Dm-31	Removing Unloading existing Truss (Timber , steel....etc)	nr	2,967.00
Dm-32	Unloading , Hoisting & Re-fixing existing Truss (Timber , steel....etc)	nr	8,460.00
Dm-33	Removing and stacking Aluminium partitions at site	m ²	297.00
Dm-34	Removing and stacking Aluminium Door or Window from existing wall & wall make good	m ²	318.00
Dm-35	Removing and stacking Aluminium Door or Window sash from existing frame	m ²	265.00
Dm-36	Removing asbestos sheet stacking serviceable material & clearing debris in single storied building	m ²	93.00


Prepared by : 

D. P. Manawadu
Engineering Assistant
(S.L.T.S Sp. Class)

Southern Provincial Engineering Services Office
Fort - Galle


Checked by : 

D.A.D. FERNANDO
Engineering Assistant (SL TS-Sp Class)
Southern Provincial Engineering Services Office
Fort - Galle.

Recommended By : 

Eng. V. K. K. Juwanabadu
Chief Engineer (School Buildings)
Provincial Engineering Service Office
Fort - Galle.

Approved by :


Director of building
Southern Province

Eng. K. P. WICKRAMAGE
Provincial Director (Buildings)
Engineering Services Office
Fort - Galle.